

# **BRAVO**


Sports and Wellness flooring



**Bravo** is a premium cushioned sports flooring designed keeping in mind the modern day requirement of a floor that is heavy duty but soft enough for a comfortable and jerk free workout in a gym, sports court or a fitness centre. The high strength wear layer takes care of the heavy loads, the "Impregnated Glass Fibre Tissue" reinforcement provide a very high dimensional stability and lay flat properties to the product in any weather conditions. The densely compacted cushioned base layer absorbs the jerks and also adds to the acoustical property of the floor.

### Salient Features

- Specially formulated high abrasion resistant wear layer which makes it "P" rated
- Superior shock absorbing cushion base layer
- These floorings are Glass Fiber Tissue (GFT) reinforced for dimensional stability & strength
- The product is suitable to medium traffic areas
- PUR surface protection
- Bravo flooring is recommended for indoor use only
- Application areas: sports courts, fitness centre, schools, yoga centers, hospitality, etc.

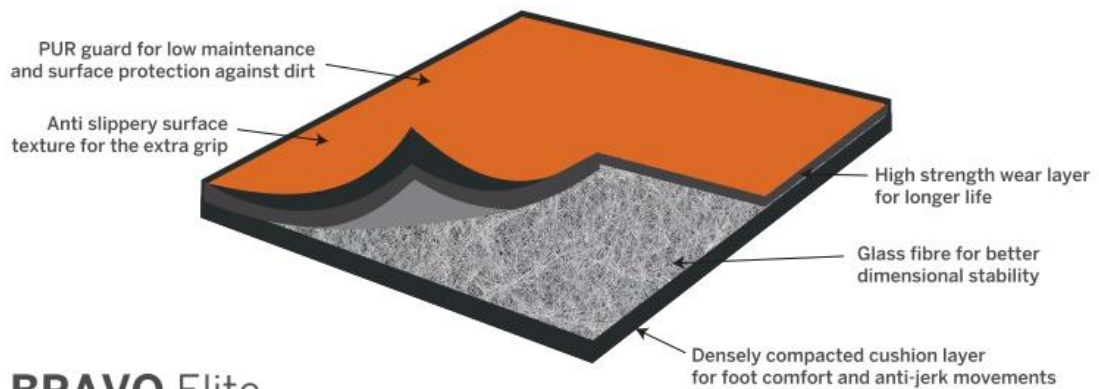

## BRAVO Elite

6.5 mm



Elite Red 081



Elite Blue 082



Elite Orange 083



Elite Green 084



Elite Wood 085A



Elite Wood 086



# BRAVO

4.5 mm



Ace 092 (Blue)



Ace 093 (Orange)



Ace 095 (Neo Silver)



Ace 094 (Green)



Ace 091 (Cherry Red)



AR 051



AR 053



AR 054

















AR 055



**NEXGEN FABRICS** – The world class vinyl flooring is a quality product from Nexgen Fabrics pvt ltd. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring on state-of-the art plant & machinery equipped with latest technology and optimum quality control. Nexgen Fabrics has a wide sales distribution network across India.

### PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	SYMBOLS	TEST METHOD	RESULTS 4.50 MM	RESULTS 6.50 MM
THICKNESS		EN 426	4.50 MM	6.50 MM
ROLL DIMENSION		EN 426	2 mtr x 15 linear mtr	2 mtr X 15 linear mtr
TOTAL WEIGHT		EN 430	3.3 KG /SQ.	4.3 KG/SQ
THICKNESS OF WEAR LAYER		EN 429	0.50 MM	1.00 MM*
DIMENSIONAL STABILITY		EN 434	≤ 0.10%	<0.10%
RESIDUAL INDENTATION AFTER STATIC LOAD		EN 433	≤ 0.40 MM	< 0.40 MM
FLEXIBILITY		EN 435	20 MM MANDREL, PASSED	20 MM MANDREL PASSED
ABRASION RESISTANCE		EN 660-2 EN 649	WEAR GROUP P	WEAR GROUP P
FLAMMABILITY		EN 13501-1	C <sub>f</sub> -S <sub>1</sub>	C <sub>f</sub> -S <sub>1</sub>
HYGIENE			TEST RESULT DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES	TEST RESULT DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES
COLOUR FASTNESS TO DAY LIGHT		ISO 105-B02	>BLUE WOOL STANDARD 5	>BLUE WOOL STANDARD 5
SLIP RESISTANCE		DIN 51130	R 9	R 9
BEARING A CASTOR CHAIR		EN 425	SUITABLE/CONTINUOUS USE	SUITABLES/CONTINUOUS USE
RESISTANCE TO CHEMICALS		EN 423	NO VISIBLE CHANGE	NO VISIBLE CHANGE
SOUND ABSORPTION		ISO 140-8 EN ISO 717-2	fj LW = 18db	fjLW = 24db
PERFORMANCE CLASSIFICATION		EN 685	33, 34	33, 34
SURFACE PROTECTION			PUR	PUR

### RECOMMENDATION FOR INSTALLATION

Nexgen Fabrics sheet must be allowed to relax for 24 hours in room temperature between 18° C and 27° C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation the base floor must be thoroughly clean, dry and free from grease & grit. We recommends use of fevicol SR 505 or any other equivalent rubber/acrylic based adhesive of similar type.

### MAINTENANCE

**Do's:** After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution. Prevent point load indentation by covering your furniture legs with rubber stopper cabs. To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution. Scuff marks on the floor can be removed with little application of diesel. Use door coir or suitable mats to minimize accumulation of dust on Nexgen Fabrics vinyl flooring. Use water to remove any chemical spill on flooring.

**Don'ts:** Do not use any strong detergent, harsh cleaning agent or dry steel wool. Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor. Don't drag any heavy object or furniture on the flooring to avoid scratches on the floor.